

PRODUCT DATA SHEET

2026-09-21



Article number:

5A08665422BV-HD


Braked castor 80 mm, red TPU-tyre, PA6-wheel

Pressed, zinc plated swivel castor. Swivel head with double ball race, assembled with a kingpin. Total brake. Thermoplastic Polyurethane wheel on nylon centre.



Image may differ from the actual product.*

DIMENSIONS

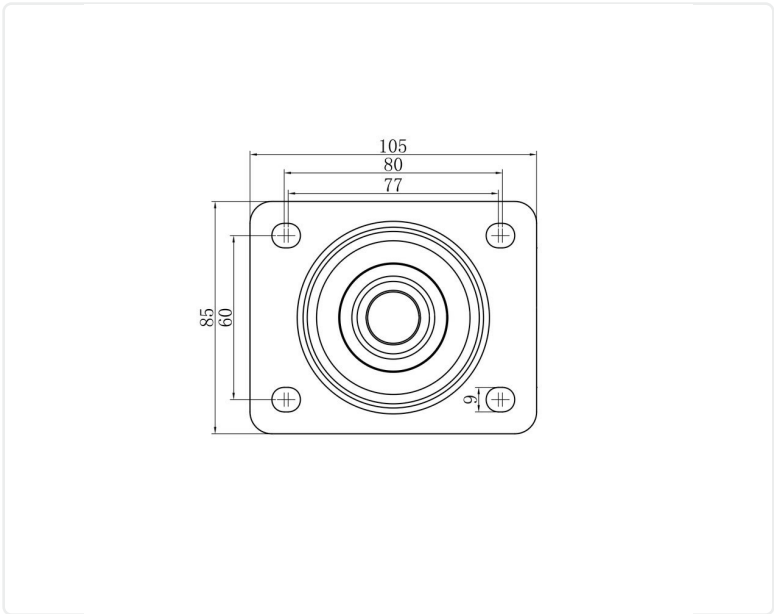

SPECIFICATIONS

Diameter	80 mm
Totalt height	108 mm
Load Capacity (dynamic)	120 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Polyurethane
Bearing	Roller bearing
Plate Size	105x83 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	98° Shore A
Brake	Total brake
Width of tread	30 mm
Material Hub	Nylon PA6
Top Hole	9 mm
Fork Width	46 mm
Dyn. Load Capacity (4km/)	120 kg
Color Tread	Red
Offset	44 mm
Material Thickness Bracket	2.5 mm
Materialthickplate	3 mm
Product Weight	0.82 kg
Temperature Range	-20°C to +70°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.