PRODUCT DATA SHEET

2026-11-22

Article number:

5610660433ESD1


Fixed castor 100 mm, TPU-tyre, conductiv, ESD

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Wheel axle with nut. Wheel with grey TPU-tyre. Hub made of grey Nylon/PA6 with threadguards. Ball bearing. ESD. Conductivity : ? 1 M?



Image may differ from the actual product.*

DIMENSIONS

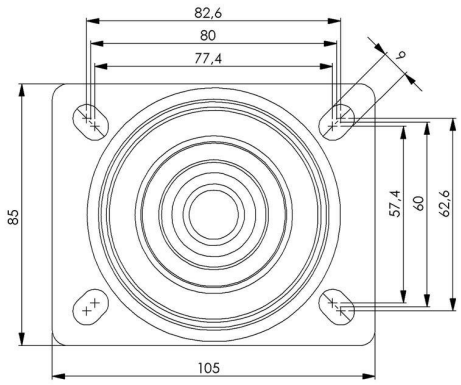

SPECIFICATIONS

Diameter	100 mm
Totalt height	132 mm
Load Capacity (dynamic)	160 kg
Castor model	Fix
Fitting	Top plate
Material Tread	Polyurethane
Bearing	Ball bearing
Plate Size	105x85 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	98° Shore A
Width of tread	36 mm
Hub Hole Diameter	10 mm
Material Hub	Nylon PA6
Top Hole	12,5x9 mm
ESD	Yes
Fork Width	48 mm
Fixed	Yes
Color Tread	Grey
Teststandard	EN 12532
Material Thickness Bracket	2 mm
Materialthickplate	2 mm
Product Weight	0.68 kg
Temperature Range	-30°C to +70°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.