

Article number:

5612660233ESD1


Fixed castor 125 mm, PA6-wheel, conductiv

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Wheel axle with nut. Wheel with roller bearing, nature PA6, threadguards. Ball bearing. ESD. Conductivity : ? 1 M?



Image may differ from the actual product.\*

DIMENSIONS

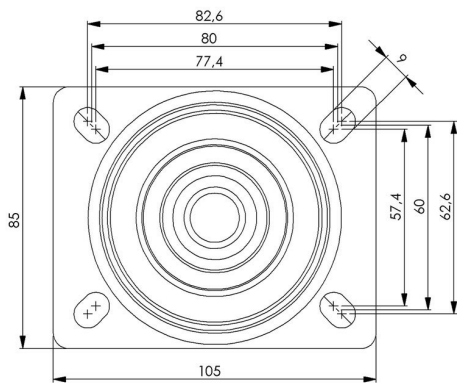

SPECIFICATIONS

|                            |                       |
|----------------------------|-----------------------|
| Diameter                   | 125                   |
| Totalt height              | 157                   |
| Load Capacity (dynamic)    | 200                   |
| Castor model               | Fix                   |
| Fitting                    | Top plate             |
| Material Tread             | Polyamide / Nylon PA6 |
| Bearing                    | Ball bearing          |
| Plate Size                 | 105x85                |
| CC Distance                | 80x60                 |
| Thread hardness (Shore°)   | 98° Shore A           |
| Width of tread             | 36                    |
| Hub Hole Diameter          | 10                    |
| Material Hub               | Nylon PA6             |
| Top Hole                   | 12,5x9                |
| ESD                        | Yes                   |
| Fork Width                 | 48                    |
| Fixed                      | Yes                   |
| Color Tread                | Grey                  |
| Teststandard               | EN 12532              |
| Material Thickness Bracket | 2                     |
| Materialthickplate         | 2                     |
| Product Weight             | 0,71                  |
| Temperature Range          | -30°C to +70°C        |
| ESD                        | ≤ 1 MΩ                |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.