

# PRODUCT DATA SHEET

2026-09-21



Article number:

5616680933GG 


Fixed castor 160 mm, elastic rubber-tyre

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Wheel axle with nut. Wheel with grey elastic rubber-tyre. Hub made of grey Nylon/PA6 with threadguards. Double Ball bearing.



Image may differ from the actual product.\*

## DIMENSIONS

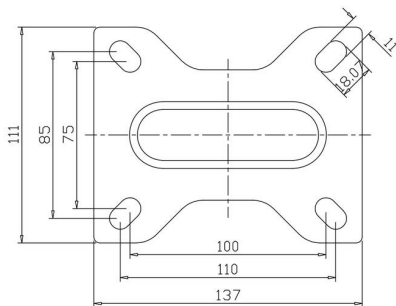

## SPECIFICATIONS

|                            |                     |
|----------------------------|---------------------|
| Diameter                   | 160 mm              |
| Totalt height              | 196 mm              |
| Load Capacity (dynamic)    | 350 kg              |
| Castor model               | Fix                 |
| Fitting                    | Top plate           |
| Material Tread             | Elastic Rubber      |
| Bearing                    | Double Ball bearing |
| Plate Size                 | 140x110 mm          |
| CC Distance                | 105x80 mm           |
| Thread hardness (Shore°)   | 75° Shore A         |
| Width of tread             | 45 mm               |
| Hub Hole Diameter          | 12 mm               |
| Material Hub               | Nylon PA6           |
| Top Hole                   | 11x14 mm            |
| Fork Width                 | 61 mm               |
| Fixed                      | Yes                 |
| Dyn. Load Capacity (4km/)  | 350 kg              |
| Color Tread                | Grey                |
| Teststandard               | EN 12532            |
| Material Thickness Bracket | 3 mm                |
| Materialthickplate         | 3 mm                |
| Product Weight             | 1.77 kg             |
| Temperature Range          | -20°C to +50°C      |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.