

Article number:

5620680432ESD


Fixed castor 200 mm, TPU-tyre, conductiv

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Wheel axle with nut. Wheel with grey TPU-tyre. Hub made of aluminium. Double Ball bearing. ESD.



Image may differ from the actual product.*

DIMENSIONS

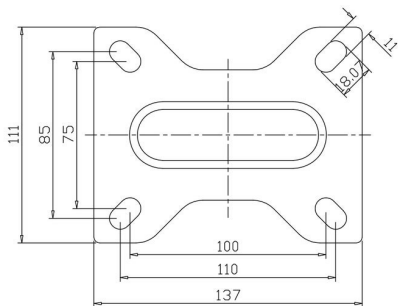

SPECIFICATIONS

Diameter	200 mm
Totalt height	236 mm
Load Capacity (dynamic)	400 kg
Castor model	Fix
Fitting	Top plate
Material Tread	Polyurethane
Bearing	Double Ball bearing
Plate Size	140x110 mm
CC Distance	105x80 mm
Thread hardness (Shore°)	80° Shore A
Width of tread	50 mm
Hub Hole Diameter	12 mm
Material Hub	Aluminium
Top Hole	11x14 mm
ESD	Yes
Fork Width	61 mm
Fixed	Yes
Dyn. Load Capacity (4km/)	400 kg
Color Tread	Grey
Teststandard	EN 12532
Material Thickness Bracket	3 mm
Materialthickplate	3 mm
Product Weight	3.31 kg
Temperature Range	-40°C to +80°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.