PRODUCT DATA SHEET

2026-11-22

Article number:

5812665433ESD1


Braked castor 125 mm, grey ESD TPU-tire, total sto

Housing made of zinc-chromatized, pressed steel with double ball race swivel head with plate fixing, screwed wheel axel. Total stop brake. Wheel with precision ball bearing and blue PUR-tyre, RAL 5015. Hub och washer in black PA6.



Image may differ from the actual product.*

DIMENSIONS

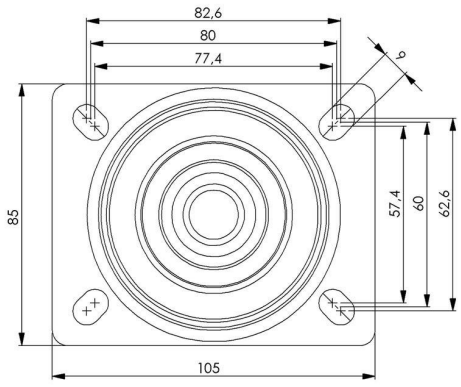

SPECIFICATIONS

Diameter	125 mm
Totalt height	157 mm
Load Capacity (dynamic)	225 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Polyurethane
Bearing	Ball bearing
Plate Size	105x85 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	98° Shore A
Brake	Total brake
Width of tread	36 mm
Material Hub	Nylon PA6
Top Hole	12,5x9 mm
ESD	Yes
Color Tread	Grey
Teststandard	EN 12532
Offset	42 mm
Material Thickness Bracket	2.5 mm
Materialthickplate	3 mm
Swivel radius	129 mm
Product Weight	1.14 kg
Temperature Range	-30°C to +70°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.