

# PRODUCT DATA SHEET

2026-09-21



Article number:

5816685222ESD


Swivel castor 160 mm,total stop brake, ESD-wheel

Housing made of zinc-chromatized, pressed steel with plate fixing 140x110 mm, screwed wheel axel.Wheel made of grey Nylon/PA6. Total stop brake ESD-wheel with Roller bearing, Conductivity  $\leq 1 \text{ M}\Omega$



Image may differ from the actual product.\*

## DIMENSIONS

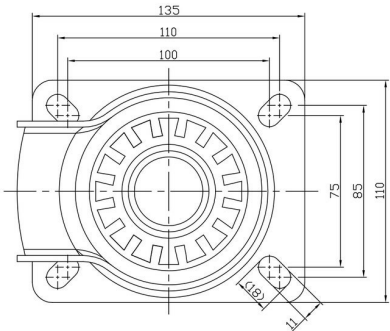

## SPECIFICATIONS

|                           |                          |
|---------------------------|--------------------------|
| Diameter                  | 160 mm                   |
| Totalt height             | 195 mm                   |
| Load Capacity (dynamic)   | 350 kg                   |
| Castor model              | Brake                    |
| Fitting                   | Top plate                |
| Material Tread            | Polyamide / Nylon PA6    |
| Bearing                   | Roller bearing           |
| Plate Size                | 140x110 mm               |
| CC Distance               | 105x80 mm                |
| Thread hardness (Shore°)  | 75° Shore D              |
| Brake                     | Total brake              |
| Width of tread            | 50 mm                    |
| Material Hub              | Nylon PA6                |
| Top Hole                  | 11x14 mm                 |
| ESD                       | Yes                      |
| Dyn. Load Capacity (4km/) | 350 kg                   |
| Color Tread               | Grey                     |
| Teststandard              | EN 12532                 |
| Product Weight            | 2.07 kg                  |
| Temperature Range         | -40°C to +80°C           |
| ESD                       | $\leq 1 \text{ M}\Omega$ |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.