

PRODUCT DATA SHEET

2026-09-21



Article number:

5816685432PZB-ALU


Braked castor 160 mm, El/Green/Con PU/CI-wheel

Pressed, zinc plated swivel castor. Swivel head with double ball race, assembled with a kingpin. Total brake. Elastic Green Polyurethane wheel on aluminium centre. Convex thread in hardness 83°Shore A.



Image may differ from the actual product.*

DIMENSIONS

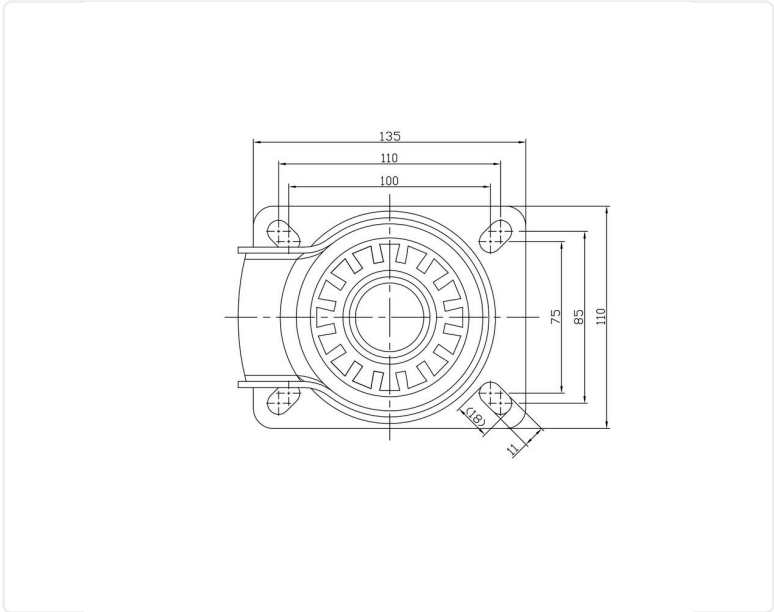

SPECIFICATIONS

Diameter	160 mm
Totalt height	195 mm
Load Capacity (dynamic)	400 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Elastic Polyurethan
Bearing	Double Ball bearing
Plate Size	140x110 mm
CC Distance	105x80 mm
Thread hardness (Shore°)	83° Shore A
Brake	Total brake
Width of tread	50 mm
Material Hub	Aluminium
Top Hole	11x14 mm
Heat Resistant	No
Dyn. Load Capacity (4km/)	400 kg
Color Tread	Green
Teststandard	EN 12532
Offset	53 mm
Material Thickness Bracket	3 mm
Materialthickplate	3.5 mm
Swivel radius	167 mm
Product Weight	2.71 kg
Temperature Range	-20°C to +70°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.