

Article number:

5816685922GS


Braked castor 160 mm, total stop brake, elastic ru

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with grey elastic rubber-tyre. Hub made of black Nylon/PA6. Rollerbearing.



Image may differ from the actual product.*

DIMENSIONS

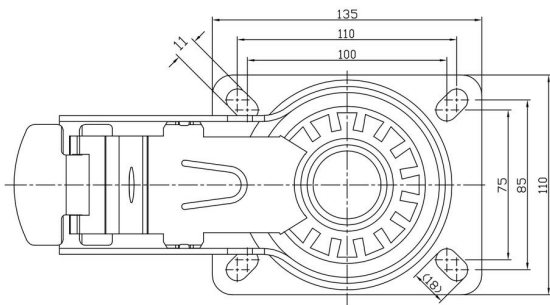

SPECIFICATIONS

Diameter	160 mm
Totalt height	195 mm
Load Capacity (dynamic)	250 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Elastic Rubber
Bearing	Roller bearing
Plate Size	140x110 mm
CC Distance	105x80 mm
Thread hardness (Shore°)	75° Shore A
Brake	Total brake
Width of tread	48 mm
Material Hub	Nylon PA6
Top Hole	11x14 mm
Dyn. Load Capacity (4km/)	250 kg
Color Tread	Grey
Teststandard	EN 12532
Offset	53 mm
Material Thickness Bracket	3 mm
Materialthickplate	3.5 mm
Swivel radius	167 mm
Product Weight	2.46 kg
Temperature Range	-20°C to +50°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.