

PRODUCT DATA SHEET

2026-09-21



Article number:

5816685932GZ-ALU


Braked castor 160 mm, elastic rubber-tyre

Housing made of zinc-chromatized, pressed steel with double ball race swivel head with plate fixing 135x110 mm, screwed wheel axel. Elastic Grey Rubber wheel on aluminium centre.



Image may differ from the actual product.*

DIMENSIONS

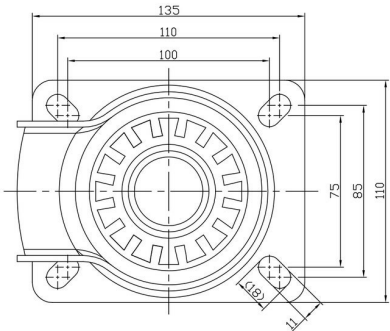

SPECIFICATIONS

Diameter	160 mm
Totalt height	195 mm
Load Capacity (dynamic)	350 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Elastic Rubber
Bearing	Double Ball bearing
Plate Size	140x110 mm
CC Distance	105x80 mm
Thread hardness (Shore°)	75° Shore A
Brake	Total brake
Width of tread	50 mm
Material Hub	Aluminium
Top Hole	11x14 mm
Heat Resistant	No
Dyn. Load Capacity (4km/)	350 kg
Color Tread	Grey
Offset	53 mm
Material Thickness Bracket	3 mm
Materialthickplate	3.5 mm
Swivel radius	167 mm
Product Weight	3.01 kg
Temperature Range	-20°C to +50°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.