


Article number:

5A10665232S-HR

Braked castor 100 mm, heat resistant phenolic-tyre

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with black heat resistant phenolic-tyre. Hub made of black heat resistant phenolic. Ball bearing.

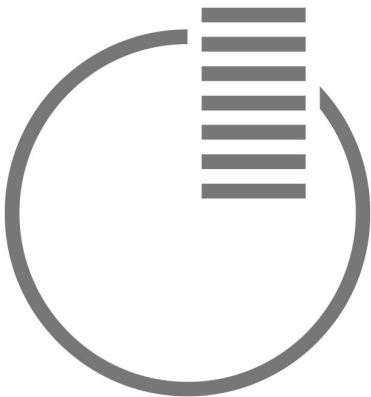

SPECIFICATIONS

Diameter	100 mm
Totalt height	128 mm
Load Capacity (dynamic)	170 kg
Fitting	Top plate
Material Tread	Phenolic Heat resistant
Bearing	Ball bearing
Plate Size	105x85 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	90° Shore D
Brake	Total brake
Width of tread	35 mm
Hub Hole Diameter	8 mm
Material Hub	Heat resistant
Top Hole	9 mm
Heat Resistant	Yes
Color Tread	Black
Offset	42 mm
Material Thickness Bracket	2.5 mm
Materialthickplate	2.5 mm
Swivel radius	124 mm
Temperature Range	-40°C to +280°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.