

# PRODUCT DATA SHEET

2026-09-21



Article number:

5A12665732NG


Braked castor 125 mm, total stop brake, PP-Sandwic

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel made of natural PP with threadguards. Ball bearing.



Image may differ from the actual product.\*

## DIMENSIONS

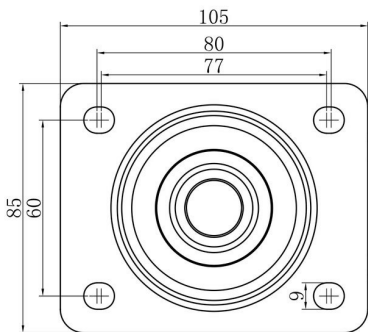

## SPECIFICATIONS

|                            |                    |
|----------------------------|--------------------|
| Diameter                   | 125 mm             |
| Totalt height              | 155 mm             |
| Load Capacity (dynamic)    | 160 kg             |
| Fitting                    | Top plate          |
| Material Tread             | Polypropylene (PP) |
| Bearing                    | Ball bearing       |
| Plate Size                 | 105x85 mm          |
| CC Distance                | 80x60 mm           |
| Thread hardness (Shore°)   | 75° Shore D        |
| Brake                      | Total brake        |
| Width of tread             | 40 mm              |
| Material Hub               | Polypropylen (pp)  |
| Top Hole                   | 9 mm               |
| Fork Width                 | 46 mm              |
| Dyn. Load Capacity (4km/)  | 160 kg             |
| Color Tread                | Nature             |
| Offset                     | 44 mm              |
| Material Thickness Bracket | 2.5 mm             |
| Materialthicknessplate     | 2.5 mm             |
| Swivel radius              | 124 mm             |
| Temperature Range          | -10°C to +60°C     |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.