

Article number:

5A12665932GZ-ALU


Braked castor 125 mm, total stop brake, elastic ru

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with grey elastic rubber-tyre. Hub made of aluminum. Double Ball bearing.



Image may differ from the actual product.*

DIMENSIONS

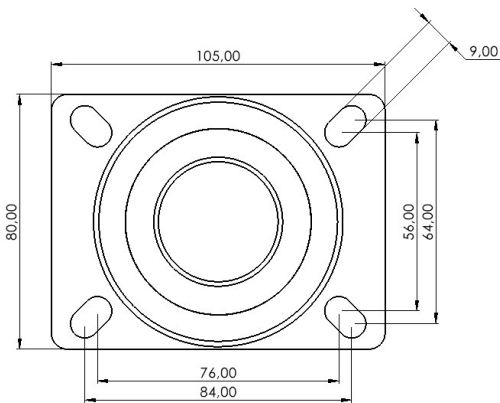

SPECIFICATIONS

Diameter	125 mm
Totalt height	155 mm
Load Capacity (dynamic)	225 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Elastic Rubber
Bearing	Double Ball bearing
Plate Size	105x85 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	75° Shore A
Brake	Total brake
Width of tread	40 mm
Material Hub	Aluminium
Top Hole	9 mm
Fork Width	46 mm
Dyn. Load Capacity (4km/)	225 kg
Color Tread	Grey
Offset	44 mm
Material Thickness Bracket	2.5 mm
Materialthickplate	2.5 mm
Swivel radius	124 mm
Product Weight	1.59 kg
Temperature Range	-20°C to +50°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.