

# PRODUCT DATA SHEET

2026-09-21



Article number:

5A1668F322SZ


Braked castor 160 mm, total stop brake, rubber-tyr

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Fix brake pedal. Wheel axle with nut. Wheel with black rubber-tyre. Hub made of sheet metal. Roller bearing



Image may differ from the actual product.\*

## DIMENSIONS

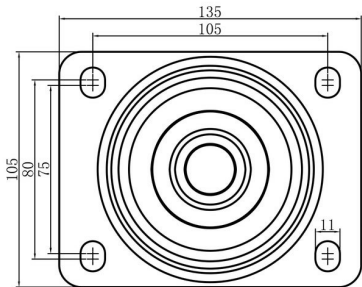

## SPECIFICATIONS

|                            |                |
|----------------------------|----------------|
| Diameter                   | 160 mm         |
| Totalt height              | 200 mm         |
| Load Capacity (dynamic)    | 140 kg         |
| Castor model               | Brake          |
| Fitting                    | Top plate      |
| Material Tread             | Rubber         |
| Bearing                    | Roller bearing |
| Plate Size                 | 140x110 mm     |
| CC Distance                | 105x80 mm      |
| Thread hardness (Shore°)   | 85° Shore A    |
| Brake                      | Total brake    |
| Width of tread             | 40 mm          |
| Material Hub               | Steel plate    |
| Top Hole                   | 11 mm          |
| Dyn. Load Capacity (4km/)  | 140 kg         |
| Color Tread                | Black          |
| Offset                     | 53 mm          |
| Material Thickness Bracket | 3 mm           |
| Product Weight             | 3.38 kg        |
| Temperature Range          | -20°C to +70°C |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.