

Article number:

5A25695932SS


Braked castor 250 mm, total stop brake, elastic ru

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with black elastic rubber-tyre. Hub made of black Nylon/PA6. Double Ball bearing.



Image may differ from the actual product.*

DIMENSIONS

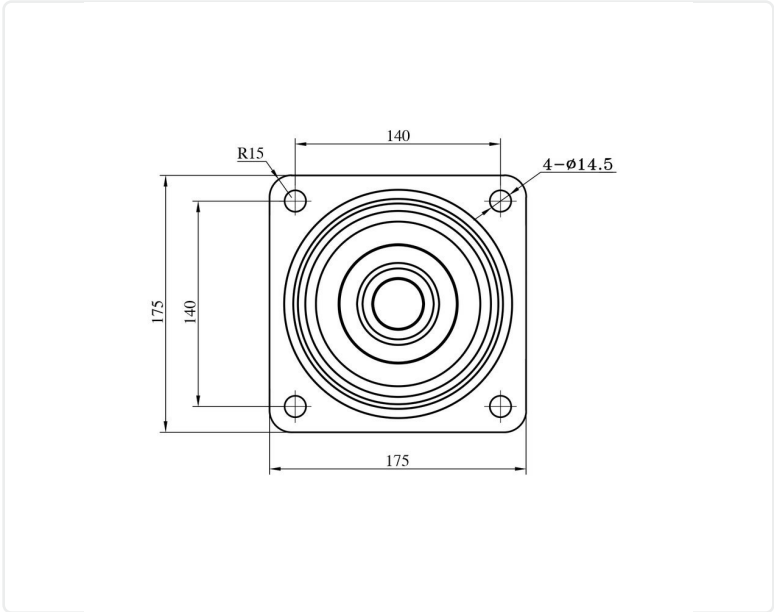

SPECIFICATIONS

Diameter	250 mm
Totalt height	290 mm
Load Capacity (dynamic)	400 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Elastic Rubber
Bearing	Double Ball bearing
Plate Size	175x175 mm
CC Distance	140x140 mm
Thread hardness (Shore°)	70° Shore A
Brake	Total brake
Width of tread	80 mm
Material Hub	Nylon PA6
Top Hole	14 mm
Dyn. Load Capacity (4km/)	400 kg
Color Tread	Black
Offset	55 mm
Material Thickness Bracket	4 mm
Materialthickplate	4 mm
Product Weight	6.88 kg
Temperature Range	-20°C to +70°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.