

PRODUCT DATA SHEET

2026-09-21



Article number:

5B10660932GS


Fixed castor 100 mm, grey elastic rubber-tyre, PA6

Pressed, zinc plated fixed castor. Top plate fitting. Elastic grey rubber wheel on nylon centre.



Image may differ from the actual product.*

DIMENSIONS

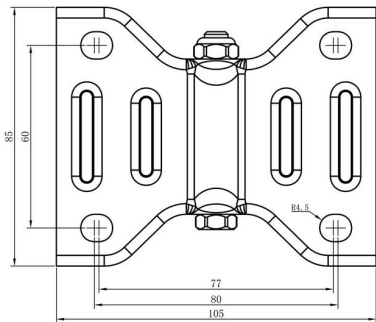

SPECIFICATIONS

Diameter	100 mm
Totalt height	128 mm
Load Capacity (dynamic)	250 kg
Castor model	Fix
Fitting	Top plate
Material Tread	Elastic Rubber
Bearing	Ball bearing
Plate Size	105x85 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	75° Shore A
Width of tread	36 mm
Material Hub	Nylon PA6
Top Hole	9 mm
Fixed	Yes
Dyn. Load Capacity (4km/)	250 kg
Color Tread	Grey
Material Thickness Bracket	2 mm
Materialthickplate	2 mm
Product Weight	0.66 kg
Temperature Range	-20°C to +60°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.