

# PRODUCT DATA SHEET

2026-09-21



Article number:

5E20685212N-HD


Braked castor 200 mm, total stop brake, PA6-wheel

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel made of white Nylon/PA6. Plain bearing.



Image may differ from the actual product.\*

## DIMENSIONS

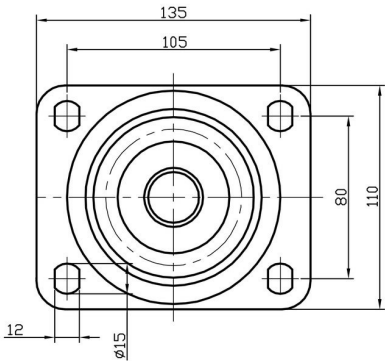

## SPECIFICATIONS

|                            |                       |
|----------------------------|-----------------------|
| Diameter                   | 200 mm                |
| Totalt height              | 239 mm                |
| Load Capacity (dynamic)    | 500 kg                |
| Castor model               | Brake                 |
| Fitting                    | Top plate             |
| Material Tread             | Polyamide / Nylon PA6 |
| Bearing                    | Plain bearing         |
| Plate Size                 | 140x110 mm            |
| CC Distance                | 105x80 mm             |
| Thread hardness (Shore°)   | 93° Shore A           |
| Brake                      | Total brake           |
| Width of tread             | 50 mm                 |
| Material Hub               | Nylon PA6             |
| Top Hole                   | 13 mm                 |
| Dyn. Load Capacity (4km/)  | 500 kg                |
| Color Tread                | White                 |
| Offset                     | 55 mm                 |
| Material Thickness Bracket | 4 mm                  |
| Materialthickplate         | 6 mm                  |
| Swivel radius              | 155 mm                |
| Product Weight             | 3.16 kg               |
| Temperature Range          | -20°C to +70°C        |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.