

Article number:

5E25685432BV-HD


Braked castor 250 mm, total stop brake, TPU-tyre

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with red TPU-tyre. Hub made of Nylon/PA6. Double Ball bearing.



Image may differ from the actual product.\*

DIMENSIONS

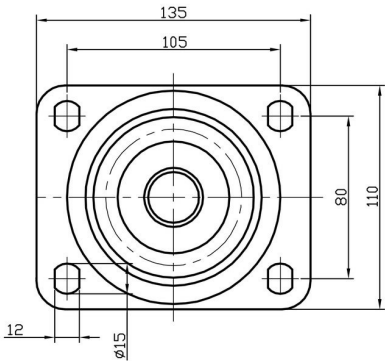

SPECIFICATIONS

|                            |                     |
|----------------------------|---------------------|
| Diameter                   | 250 mm              |
| Totalt height              | 292 mm              |
| Load Capacity (dynamic)    | 750 kg              |
| Castor model               | Brake               |
| Fitting                    | Top plate           |
| Material Tread             | Polyurethane        |
| Bearing                    | Double Ball bearing |
| Plate Size                 | 140x110 mm          |
| CC Distance                | 105x80 mm           |
| Thread hardness (Shore°)   | 98° Shore A         |
| Brake                      | Total brake         |
| Width of tread             | 50 mm               |
| Material Hub               | Nylon PA6           |
| Top Hole                   | 13 mm               |
| Dyn. Load Capacity (4km/)  | 750 kg              |
| Color Tread                | Red                 |
| Offset                     | 55 mm               |
| Material Thickness Bracket | 4 mm                |
| Materialthickplate         | 6 mm                |
| Swivel radius              | 180 mm              |
| Product Weight             | 4.23 kg             |
| Temperature Range          | -20°C to +70°C      |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.