

Article number:

5F126804320Z-ALU


Fixed castor 125 mm, PU-tyre

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Wheel axle with nut. Wheel with orange PU-tyre. Hub made of aluminium. Double Ball bearing.



Image may differ from the actual product.\*

DIMENSIONS

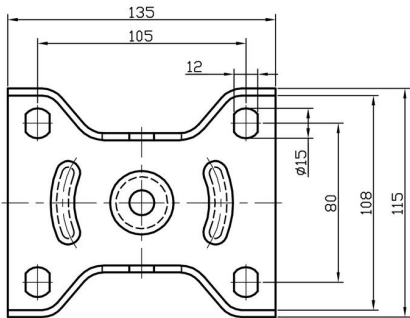

SPECIFICATIONS

|                            |                     |
|----------------------------|---------------------|
| Diameter                   | 125 mm              |
| Totalt height              | 164 mm              |
| Load Capacity (dynamic)    | 450 kg              |
| Castor model               | Fix                 |
| Fitting                    | Top plate           |
| Material Tread             | Polyurethane        |
| Bearing                    | Double Ball bearing |
| Plate Size                 | 140x110 mm          |
| CC Distance                | 105x80 mm           |
| Thread hardness (Shore°)   | 93° Shore A         |
| Width of tread             | 50 mm               |
| Material Hub               | Aluminium           |
| Top Hole                   | 13 mm               |
| Fixed                      | Yes                 |
| Dyn. Load Capacity (4km/)  | 450 kg              |
| Color Tread                | Orange              |
| Material Thickness Bracket | 3,5 mm              |
| Materialthickplate         | 3,5 mm              |
| Product Weight             | 2,12 kg             |
| Temperature Range          | -20°C to +70°C      |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.