PRODUCT DATA SHEET

2026-11-03

Article number:

8012675332ESD


Braked castor 125 mm, total stop brake, TPE-tyre,

Swivel bracket with total stop brake. Injection moulded plastic bracket in grey PA6-GF35 with ball bearings in the swivel head. Top plate fitting. Wheel axle with nut. Wheel with grey TPE-tyre. Hub made of grey PP with threadguards. Ball bearing. ESD. Part of the Stockholm series.



Image may differ from the actual product.*

DIMENSIONS

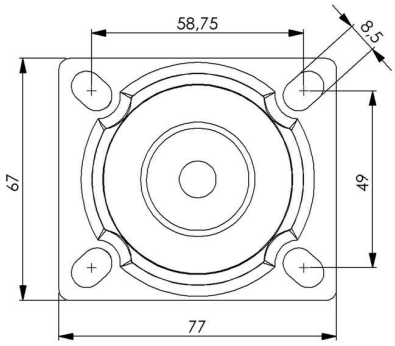

SPECIFICATIONS

Diameter	125 mm
Totalt height	167 mm
Load Capacity (dynamic)	100 kg
Castor model	Brake
Fitting	Top plate
Material Tread	TPE
Bearing	Ball bearing
Plate Size	77x67 mm
CC Distance	59x49 mm
Thread hardness (Shore°)	85° Shore A
Brake	Total brake
Width of tread	32 mm
Material Hub	Polypropylen (pp)
Top Hole	12x8,5 mm
ESD	Yes
Color Tread	Grey RAL 7012
Teststandard	EN 12530
Offset	44 mm
Ball bearing	6202-ZZ
Materialthickplate	2,5 mm
Swivel radius	107 mm
Product Weight	0 kg
Temperature Range	-20°C to +50°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.