PRODUCT DATA SHEET

2026-11-22

Article number:

4005006601ESD1


Braked castor 50 mm, wheel brake, TPE-tyre, conduc

Swivel bracket with wheel brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Center hole fitting. Riveted wheel axle. Wheel with grey TPE-tyre. Hub made of grey PP. Plain bearing. ESD.



Image may differ from the actual product.*

DIMENSIONS

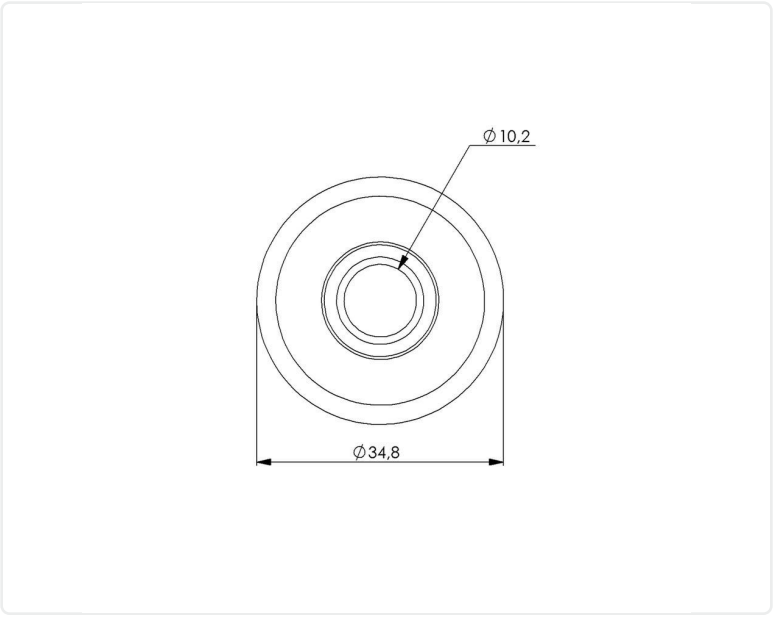

SPECIFICATIONS

Diameter	50 mm
Totalt height	64 mm
Load Capacity (dynamic)	40 kg
Castor model	Brake
Fitting	Center hole
Material Tread	TPE
Bearing	Rivet
Thread hardness (Shore°)	85° Shore A
Centre Bolt Hole	10.2 mm
Brake	Wheel brake
Width of tread	20 mm
Material Hub	Polypropylen (pp)
ESD	Yes
Color Tread	Grey
Teststandard	EN 12530
Offset	17.5 mm
Material Thickness Bracket	1.5 mm
Swivel radius	65 mm
Product Weight	0.11 kg
Temperature Range	-20°C to +50°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.