

Article number:

4005626401TGEE


Braked castor 50 mm, TPU-tyre

Swivel bracket with wheel brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Grey laquered. Riveted wheel axle. Inline wheel with transparent TPU-tyre. Hub made of grey polycarbonate. Plain bearing.



Image may differ from the actual product.*

DIMENSIONS

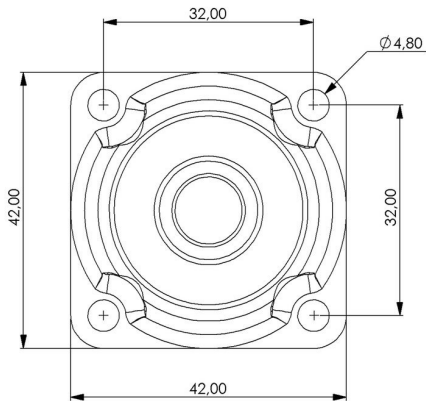

SPECIFICATIONS

Diameter	50 mm
Totalt height	65 mm
Load Capacity (dynamic)	40 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Polyurethane
Bearing	Rivet
Plate Size	42x42 mm
CC Distance	32x32 mm
Thread hardness (Shore°)	98° Shore A
Brake	Wheel brake
Width of tread	19 mm
Material Hub	Polycarbonate (PC)
Top Hole	4.8 mm
Painted Housing	Silver
Color Tread	Transparent
Teststandard	EN 12530
Offset	17,5 mm
Material Thickness Bracket	1,5 mm
Materialthickplate	1,5 mm
Swivel radius	65 mm
Product Weight	0,12 kg
Temperature Range	-20°C to +50°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.