

Article number:

4005626401TGES


Braked castor 50 mm, TPU-tyre

Swivel bracket with wheel brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. White laquered. Riveted wheel axle. Inline wheel with transparent TPU-tyre. Hub made of grey polycarbonate. Plain bearing.



Image may differ from the actual product.*

DIMENSIONS

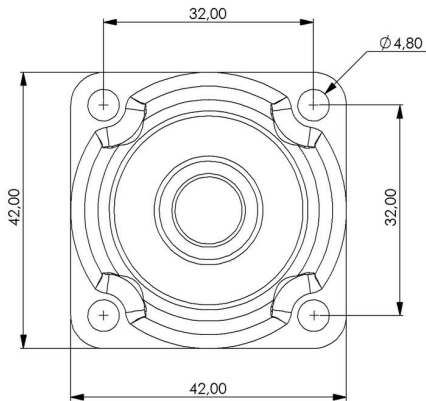

SPECIFICATIONS

Diameter	50 mm
Totalt height	64 mm
Load Capacity (dynamic)	40 kg
Fitting	Top plate
Material Tread	Polyurethane
Bearing	Rivet
Plate Size	42x42 mm
CC Distance	32x32 mm
Thread hardness (Shore°)	98° Shore A
Brake	Wheel brake
Width of tread	20 mm
Material Hub	Polycarbonate (PC)
Top Hole	4.8 mm
Painted Housing	White
Dyn. Load Capacity (4km/)	40 kg
Color Tread	Transparent
Offset	17,5 mm
Material Thickness Bracket	1,5 mm
Materialthicknessplate	1,5 mm
Swivel radius	65 mm
Temperature Range	-20°C to +50°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.