

Article number:

4107005401TGEV


Braked castor 75 mm, total stop brake, TPU-tyre

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Center hole fitting. White laquered. Riveted wheel axle. Inline wheel with transparent TPU-tyre. Hub made of grey polycarbonate. Plain bearing.



Image may differ from the actual product.*

DIMENSIONS

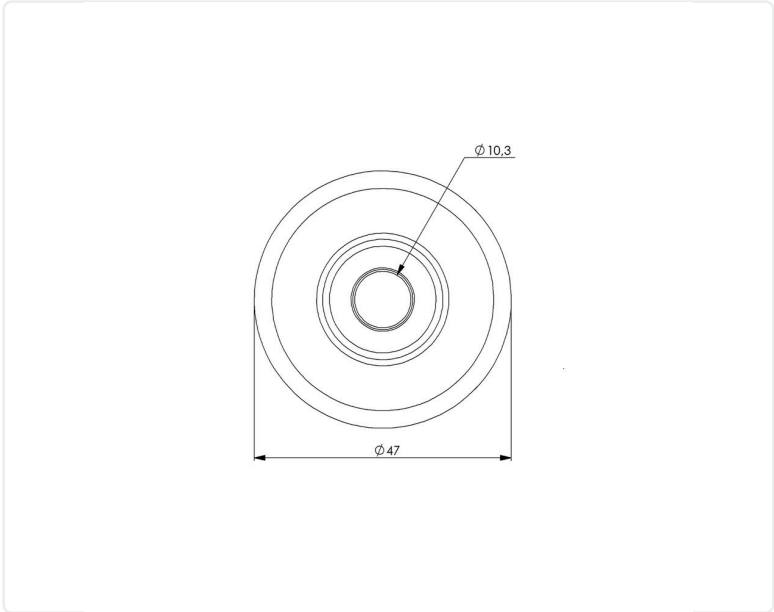

SPECIFICATIONS

Diameter	75 mm
Totalt height	98 mm
Load Capacity (dynamic)	55 kg
Castor model	Brake
Fitting	Center hole
Material Tread	Polyurethane
Bearing	Rivet
Thread hardness (Shore°)	98° Shore A
Centre Bolt Hole	10.2 mm
Brake	Total brake
Width of tread	24 mm
Material Hub	Polycarbonate (PC)
Painted Housing	White
Dyn. Load Capacity (4km/)	55 kg
Color Tread	Transparent
Offset	35 mm
Material Thickness Bracket	2 mm
Swivel radius	82 mm
Product Weight	0.29 kg
Temperature Range	-20°C to +50°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.