

Article number:

4107655641ESD1


Braked castor 75 mm, total stop brake, TPU-tyre, c

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Riveted wheel axle. Wheel with grey TPE-tyre. Hub made of grey PP with threadguards. Plain bearing. ESD.



Image may differ from the actual product.\*

DIMENSIONS

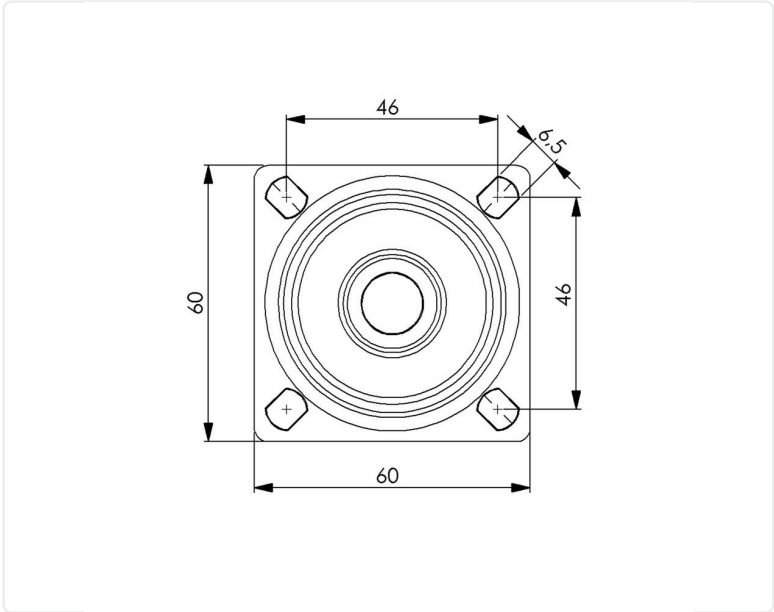

SPECIFICATIONS

|                            |                   |
|----------------------------|-------------------|
| Diameter                   | 75 mm             |
| Totalt height              | 99 mm             |
| Load Capacity (dynamic)    | 55 kg             |
| Castor model               | Brake             |
| Fitting                    | Top plate         |
| Material Tread             | TPE               |
| Bearing                    | Plain bearing     |
| Plate Size                 | 60x60 mm          |
| CC Distance                | 46x46 mm          |
| Thread hardness (Shore°)   | 85° Shore A       |
| Brake                      | Total brake       |
| Width of tread             | 24 mm             |
| Material Hub               | Polypropylen (pp) |
| Top Hole                   | 8,5x6,5 mm        |
| ESD                        | Yes               |
| Color Tread                | Grey              |
| Teststandard               | EN 12530          |
| Offset                     | 35 mm             |
| Material Thickness Bracket | 2 mm              |
| Materialthickplate         | 2 mm              |
| Swivel radius              | 82 mm             |
| Product Weight             | 0.37 kg           |
| Temperature Range          | -20°C to +50°C    |
| ESD                        | ≤ 1 MΩ            |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.