

Article number:

4110000612ESD1


Swivel castor 100 mm, TPE-tyre, conductiv

Swivel bracket. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Center hole fitting. Screwed wheel axle. Wheel with grey TPE-tyre. Hub made of grey PP with threadguards. Plain bearing. ESD.



Image may differ from the actual product.*

DIMENSIONS

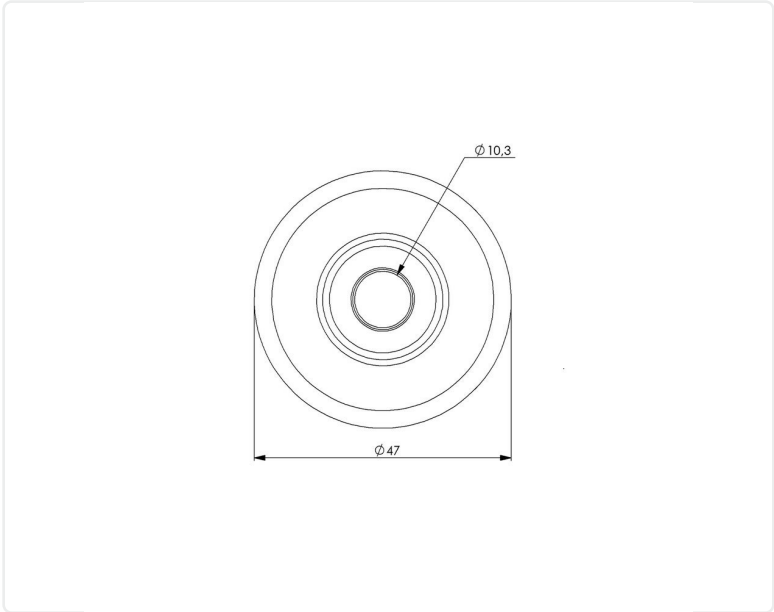

SPECIFICATIONS

Diameter	100 mm
Totalt height	120 mm
Load Capacity (dynamic)	55 kg
Fitting	Center hole
Material Tread	TPE
Bearing	Plain bearing
Thread hardness (Shore°)	85° Shore A
Centre Bolt Hole	10.2 mm
Width of tread	24 mm
Material Hub	Polypropylen (pp)
ESD	Yes
Color Tread	Grey
Teststandard	EN 12530
Offset	37 mm
Material Thickness Bracket	2 mm
Swivel radius	85 mm
Temperature Range	-20°C to +50°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.