

Article number:

**4207650341GS**


Fixed castor 75 mm, TPE-tyre

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Riveted wheel axle. Wheel with grey TPE-tyre. Hub made of black PP with threadguards. Plain bearing.



Image may differ from the actual product.\*

## DIMENSIONS

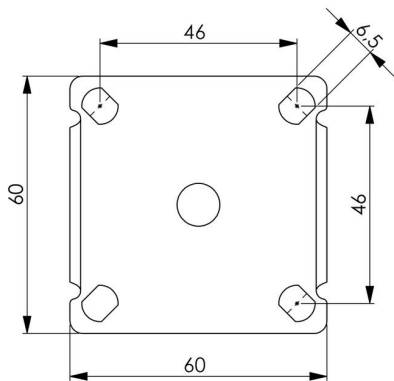

## SPECIFICATIONS

|                            |                   |
|----------------------------|-------------------|
| Diameter                   | 75 mm             |
| Totalt height              | 99 mm             |
| Load Capacity (dynamic)    | 55 kg             |
| Castor model               | Fix               |
| Fitting                    | Top plate         |
| Material Tread             | TPE               |
| Bearing                    | Plain bearing     |
| Plate Size                 | 60x60 mm          |
| CC Distance                | 46x46 mm          |
| Thread hardness (Shore°)   | 85° Shore A       |
| Width of tread             | 24 mm             |
| Material Hub               | Polypropylen (pp) |
| Top Hole                   | 8,5x6,5 mm        |
| Fixed                      | Yes               |
| Dyn. Load Capacity (4km/)  | 55 kg             |
| Color Tread                | Grey              |
| Material Thickness Bracket | 2 mm              |
| Materialthickplate         | 2 mm              |
| Product Weight             | 0.23 kg           |
| Temperature Range          | -20°C to +50°C    |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.