

PRODUCT DATA SHEET

2026-09-21



Article number:

4310650632ESD1


Swivel castor 100 mm, TPE-tyre, conductiv

Swivel bracket. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Center hole fitting. Wheel axle with nut. Wheel with grey TPE-tyre. Hub made of grey Nylon/PA6 with threadguards. Ball bearing. ESD.



Image may differ from the actual product.*

DIMENSIONS

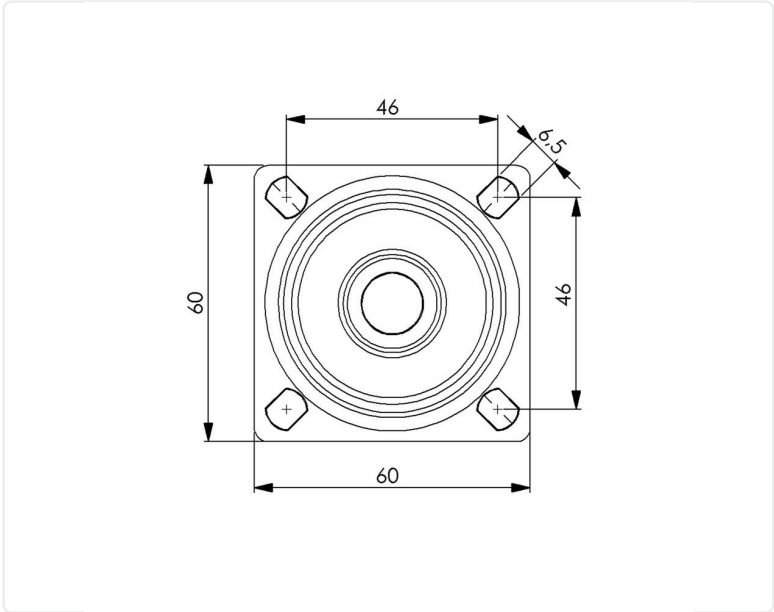

SPECIFICATIONS

Diameter	100 mm
Totalt height	126 mm
Load Capacity (dynamic)	70 kg
Castor model	Swivel
Fitting	Top plate
Material Tread	TPE
Bearing	Ball bearing
Plate Size	60x60 mm
CC Distance	46x46 mm
Thread hardness (Shore°)	85° Shore A
Width of tread	32 mm
Material Hub	Nylon PA6
Top Hole	8,5x6,5 mm
ESD	Yes
Color Tread	Grey
Teststandard	EN 12530
Offset	41 mm
Material Thickness Bracket	2,5 mm
Materialthickplate	2 mm
Swivel radius	91 mm
Product Weight	0,47 kg
Temperature Range	-20°C to +50°C
ESD	≤ 1 MΩ

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.