

Article number:

4312005411SSS


Braked castor 125 mm, total stop brake, TPU-tyre

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Center hole fitting. Black lacquered. Riveted wheel axle. Wheel with black TPU-tyre. Hub made of black PP with threadguards. Plain bearing.



Image may differ from the actual product.\*

DIMENSIONS

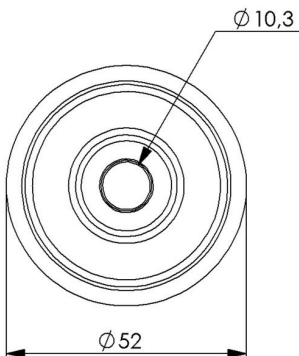

SPECIFICATIONS

|                            |                |
|----------------------------|----------------|
| Diameter                   | 125 mm         |
| Totalt height              | 150 mm         |
| Load Capacity (dynamic)    | 70 kg          |
| Castor model               | Brake          |
| Fitting                    | Center hole    |
| Material Tread             | Polyurethane   |
| Bearing                    | Plain bearing  |
| Thread hardness (Shore°)   | 98° Shore A    |
| Centre Bolt Hole           | 10.2 mm        |
| Brake                      | Total brake    |
| Width of tread             | 28 mm          |
| Material Hub               | Nylon PA6      |
| Painted Housing            | Black          |
| Color Tread                | Black          |
| Offset                     | 41 mm          |
| Material Thickness Bracket | 2,5 mm         |
| Swivel radius              | 115 mm         |
| Product Weight             | 0,6 kg         |
| Temperature Range          | -20°C to +50°C |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.