

PRODUCT DATA SHEET

2026-09-21



Article number:

5820685322SR-LG


Braked castor 200 mm, total stop brake, pneumatic-

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with balck pneumatic rubber-tyre. Hub made of red PP. Roller bearing.



Image may differ from the actual product.*

DIMENSIONS

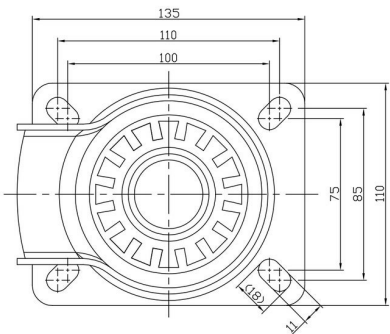

SPECIFICATIONS

Diameter	200 mm
Totalt height	235 mm
Load Capacity (dynamic)	60 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Pneumatic wheel
Bearing	Roller bearing
Plate Size	140x110 mm
CC Distance	105x80 mm
Thread hardness (Shore°)	65° Shore A
Brake	Total brake
Width of tread	50 mm
Material Hub	Polypropylen (pp)
Top Hole	11x14 mm
Pneumatic Wheel	Yes
Diameter second/outer	24 mm
Wheel Pattern	Ribbed
No. of Plies	2 st
Color Tread	Red
Offset	53 mm
Material Thickness Bracket	3 mm
Materialthickplate	4 mm
Swivel radius	162 mm
Product Weight	2,3 kg
Temperature Range	-20°C to +60°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.