

PRODUCT DATA SHEET

2026-09-21



Article number:

5A26695322SR-LG


Braked castor 260 mm, total stop brake, pneumatic-

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with balck pneumatic rubber-tyre. Hub made of red PP. Roller bearing.



Image may differ from the actual product.*

DIMENSIONS

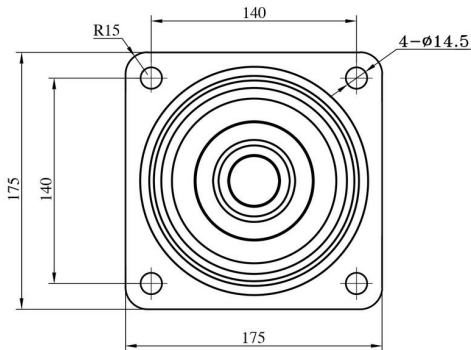

SPECIFICATIONS

Diameter	260 mm
Totalt height	295 mm
Load Capacity (dynamic)	150 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Pneumatic wheel
Bearing	Roller bearing
Plate Size	175x175 mm
CC Distance	140x140 mm
Thread hardness (Shore°)	65° Shore A
Brake	Total brake
Width of tread	85 mm
Material Hub	Polypropylen (pp)
Top Hole	14 mm
Pneumatic Wheel	Yes
Diameter second/outer	22 mm
Wheel Pattern	Block
No. of Plies	4 st
Dyn. Load Capacity (4km/)	150 kg
Color Tread	Black
Offset	55 mm
Material Thickness Bracket	4 mm
Materialthickplate	4 mm
Product Weight	4,83 kg
Temperature Range	-20°C to +70°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.