

# PRODUCT DATA SHEET

2026-09-21



Article number:

5B26690322SR-LG


Fixed castor 260 mm, pneumatic-tyre

Fixed bracket made of zinc-chromatized pressed sheet metal. Top plate fitting. Wheel axle with nut. Wheel with black pneumatic rubber-tyre. Hub made of black PP. Roller bearing.



Image may differ from the actual product.\*

## DIMENSIONS

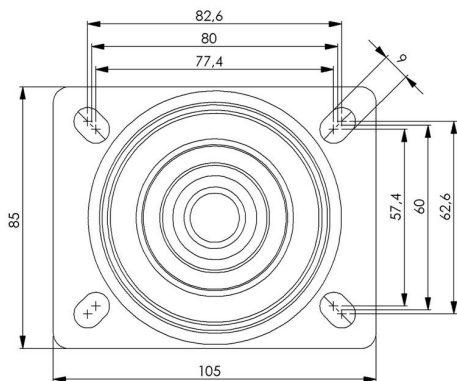

## SPECIFICATIONS

|                            |                   |
|----------------------------|-------------------|
| Diameter                   | 260 mm            |
| Totalt height              | 295 mm            |
| Load Capacity (dynamic)    | 150 kg            |
| Castor model               | Fix               |
| Fitting                    | Top plate         |
| Material Tread             | Pneumatic wheel   |
| Bearing                    | Roller bearing    |
| Plate Size                 | 230x130 mm        |
| CC Distance                | 190x75 mm         |
| Thread hardness (Shore°)   | 65° Shore A       |
| Width of tread             | 85 mm             |
| Material Hub               | Polypropylen (pp) |
| Top Hole                   | 14 mm             |
| Pneumatic Wheel            | Yes               |
| Diameter second/outer      | 22 mm             |
| Wheel Pattern              | Block             |
| No. of Plies               | 4 st              |
| Fixed                      | Yes               |
| Dyn. Load Capacity (4km/)  | 150 kg            |
| Color Tread                | Black             |
| Material Thickness Bracket | 4 mm              |
| Materialthickplate         | 4 mm              |
| Product Weight             | 3.7 kg            |
| Temperature Range          | -20°C to +70°C    |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.