

# PRODUCT DATA SHEET

2026-09-21



Article number:

5G20690322SR-LG


Swivel castor 200 mm, pneumatic-wheel

Swivel bracket. Made of zinc-chromatized pressed sheet metal with a ball bearing in the swivel head. Top plate fitting. Wheel axle with nut. Wheel with black pneumatic rubber-tyre. Hub made of red PP. Roller bearing.



Image may differ from the actual product.\*

## DIMENSIONS

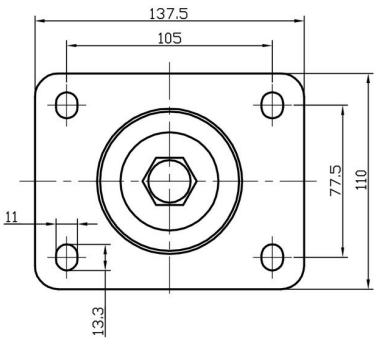

## SPECIFICATIONS

|                            |                   |
|----------------------------|-------------------|
| Diameter                   | 200 mm            |
| Totalt height              | 240 mm            |
| Load Capacity (dynamic)    | 60 kg             |
| Castor model               | Swivel            |
| Fitting                    | Top plate         |
| Material Tread             | Pneumatic wheel   |
| Bearing                    | Roller bearing    |
| Plate Size                 | 140x110 mm        |
| CC Distance                | 105x80 mm         |
| Thread hardness (Shore°)   | 65° Shore A       |
| Width of tread             | 50 mm             |
| Material Hub               | Polypropylen (pp) |
| Top Hole                   | 11 mm             |
| Pneumatic Wheel            | Yes               |
| Diameter second/outer      | 24 mm             |
| Wheel Pattern              | Ribbed            |
| No. of Plies               | 2 st              |
| Color Tread                | Red               |
| Offset                     | 56 mm             |
| Material Thickness Bracket | 6 mm              |
| Materialthickplate         | 6 mm              |
| Product Weight             | 2.37 kg           |
| Temperature Range          | -20°C to +60°C    |

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.