

PRODUCT DATA SHEET

2026-09-21



Article number:

5H26690322SR-LG


Fixed castor 260 mm, pneumatic-tyre

Fixed bracket made of zinc-chromatized welded steel. Top plate fitting. Wheel axle with nut. Wheel with black pneumatic rubber-tyre. Hub made of black PP. Roller bearing.



Image may differ from the actual product.*

DIMENSIONS

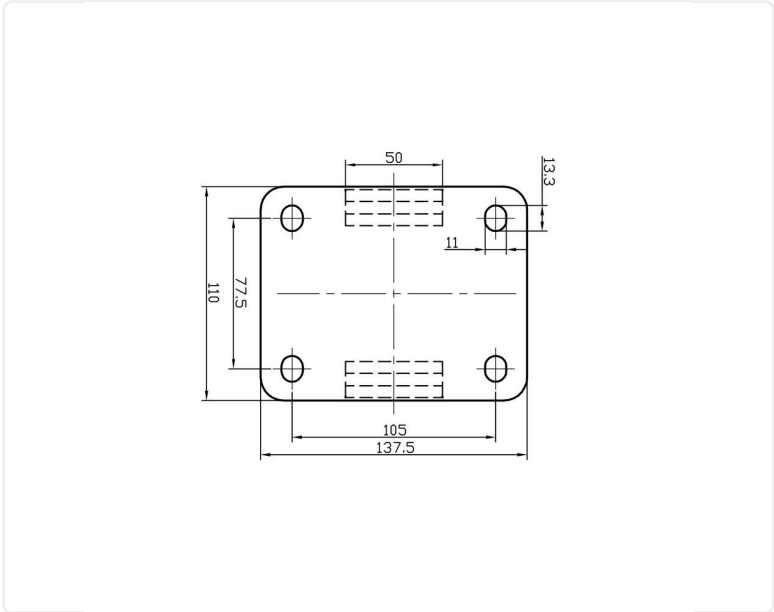

SPECIFICATIONS

Diameter	260 mm
Totalt height	320 mm
Load Capacity (dynamic)	100 kg
Castor model	Fix
Fitting	Top plate
Material Tread	Pneumatic wheel
Bearing	Roller bearing
Plate Size	140x110 mm
CC Distance	105x80 mm
Thread hardness (Shore°)	65° Shore A
Width of tread	85 mm
Material Hub	Polypropylen (pp)
Top Hole	11 mm
Pneumatic Wheel	Yes
Diameter second/outer	22 mm
Wheel Pattern	Block
No. of Plies	4 st
Fixed	Yes
Dyn. Load Capacity (4km/)	100 kg
Color Tread	Black
Material Thickness Bracket	6 mm
Materialthickplate	6 mm
Product Weight	2.76 kg
Temperature Range	-20°C to +60°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.