

Article number:

5A10665312SS-HR


Braked castor 100 mm, total stop brake, heat resis

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with black heat resistant rubber-tyre. Hub made of black heat resistant phenolic. Plain bearing.



Image may differ from the actual product.*

DIMENSIONS

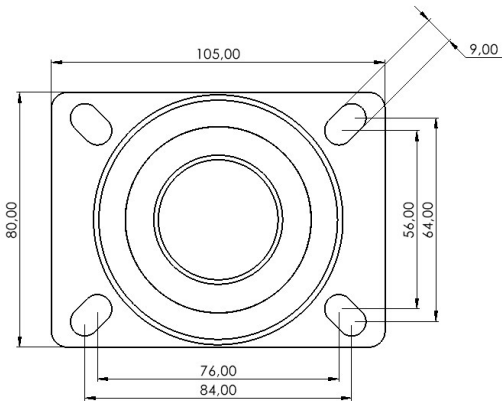

SPECIFICATIONS

Diameter	100 mm
Totalt height	128 mm
Load Capacity (dynamic)	120 kg
Castor model	Brake
Fitting	Top plate
Material Tread	Rubber Heat resistant
Bearing	Plain bearing
Plate Size	105x85 mm
CC Distance	80x60 mm
Thread hardness (Shore°)	85° Shore A
Brake	Total brake
Width of tread	38 mm
Material Hub	Heat resistant
Top Hole	9 mm
Heat Resistant	Yes
Color Tread	Black
Offset	42 mm
Material Thickness Bracket	2.5 mm
Materialthickplate	2.5 mm
Swivel radius	124 mm
Product Weight	0.85 kg
Temperature Range	-40°C to +280°C

Numeric values in the technical specification may be nominal/rounded to the nearest standard dimension. To see exact values, please refer to the drawing.